

SHAKER MOTOR KIT # 502-5027-01 INSTRUCTIONS (FOR ALL SPIKE SYSTEM GAMES)

1. Install the shaker motor assembly in the right front corner of the pinball cabinet using the (4) # 8 - 32 X 5/8" screws (included).
2. Connect the 5-pin Z-header (included) to the 5 pin connector coming from the shaker motor assembly.
3. Connect one of the 5-pin connectors from the red and blue wiring harness (included) to the 5-pin Z header that was connected to the shaker motor assembly in step (2) (See Figure 1).
4. Connect the other 5-pin connector from the red and blue wiring harness to connector CN2 (fig 2) on the cabinet node board located on the left front wall of the cabinet. (See Figure 2).
5. Install the cover to the shaker motor assembly with the (2) # 8 - 32 X 3/8" screws (included).

Figure 1

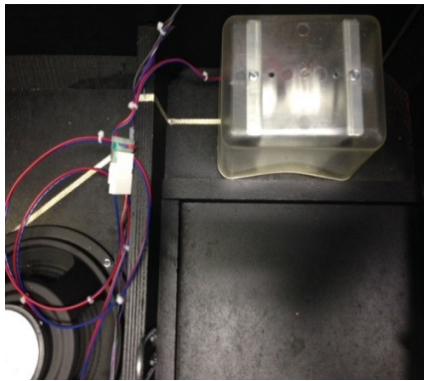


figure 2

